



GENERAL FEATURES

These resistors are designed to obtain maximum power dissipation under optimum operating conditions.

The resistive wire is wound on a suitable ceramic support to sustain high thermal shock and is entirely covered with inorganic cement resistant to solvents. The protection offered is not only non-inflammable, but is also sufficient for normal environmental conditions. The temperature resistance of the cement is greater than the fusion temperature of the winding wire.

The connections are realised with standard collars or terminal pressure plugs (fast-on); the electric contact is guaranteed by electric spot welding.

The adjustment collar enables the user to establish an intermediate value. The stability of the contact is guaranteed up to the maximum surface temperature of 350° C.

ELECTRICAL CHARACTERISTICS

- Standard tolerance: + 15%
- Temperature coefficient ≤ 100 ppm/°C
- Insulation resistance > 100 Mohm (500 Vdc)
- Max operating temperature: 350 °C


MAXIMUM LOAD LIMIT

NOTE: For adjustable resistors it must be born in mind that the nominal power is understood as applied to the entire resistor, if only part of it is under tension, the power applied must be reduced in proportion to the part that is not used.

The nominal power P_n shown in the table refers to resistors placed horizontally and free in naturally circulating air, with an environmental temperature of 25° C.

With forced ventilation the nominal power dissipation capacity of the resistor increases as a function of the air speed.

GENERAL FEATURES

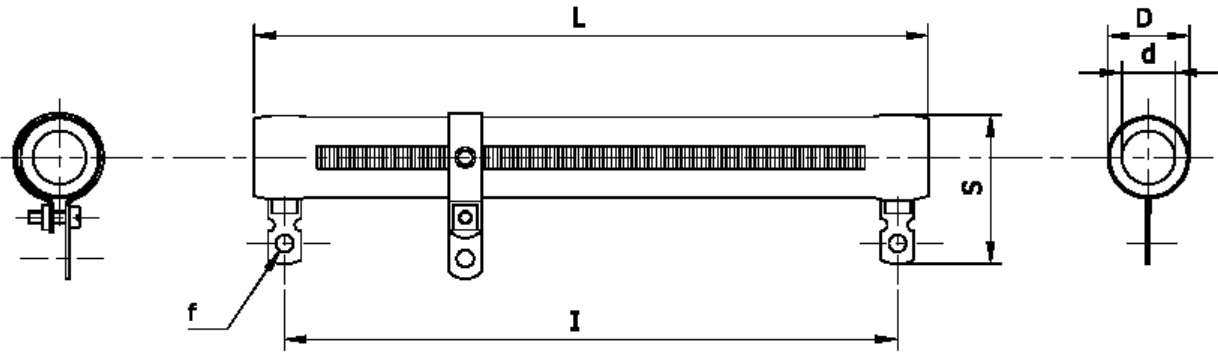

PMAR TYPE	8x45	13x64	14x51	14x76	14x102	16x90	19x165	29x165	29x215	29x265
Power rating	12 W	25 W	25 W	35 W	50 W	50 W	100 W	150 W	200 W	250 W
Min. Resistance	2R2	2R2	2R2	2R2	2R2	2R2	2R2	2R2	2R2	2R2
Max Resistance	2K2	3K9	3K9	4K7	6K8	6K8	15K	18K	25K	30K
Limit voltage	500 V	700 V	700 V	1000 V	1500 V	1500 V	2000 V	2000 V	2500 V	3000 V
DIMENSIONS	8x45	13x64	14x51	14x76	14x102	16x90	19x165	29x165	29x215	29x265
L mm	45	64	51	76	102	90	165	165	215	265
D mm	10	15,5	15,5	15,5	15,5	18	20,5	30,5	30,5	30,5
d mm	5	7	8,2	8,2	8,2	9,5	13	18,5	18,5	18,5
I mm	36	51	38	63	69	78	150	150	200	250
S mm	23	29	29	29	29	32	36	46	46	46
f mm	3,2	3,2	3,2	3,2	3,2	3,2	4,2	4,2	4,2	4,2

The ohmic value shown (min – max) are intended as total resistance of winding